



Fan Unit (Optional)



Plate door border

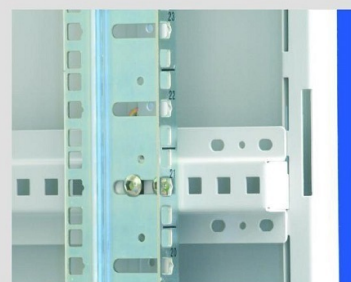

Adjustable mounting profile and mounting angle

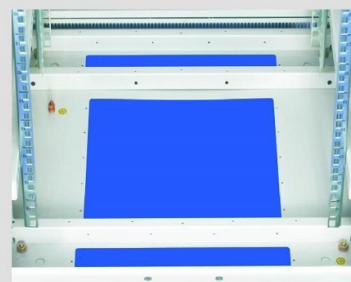

Lockable cable entry

Standard:

- Comply with ANSI/EIA RS-310-D、IEC297-2、DIN41494;PART1、DIN41494; PART7、ETSI standard.

Feature:

- Exquisite design with precise dimension and craftsmanship;
- Toughened glass front door with silk-screened flower pattern, door border and steel rear door;
- Blue Zinc Mounting Profiles, free of static;
- Adjustable feet and heavy duty castors are available at the same time;
- Several lockable cable entry on top cover and bottom panel with adjustable sizes;
- Optional plinth enables cabinet to stay in a fixed position, meeting requirements of under-base cable entry/ventilation and prevention;
- Efficient cabinet buying kit(patent);
- Removable side panels, easy to install and maintain;

- Around 1/2~2/3 of original assembled volume when flat pack.

Material:

- SPCC cold rolled steel;
Thickness: mounting profile 2.0mm, mounting angle 1.5mm, others 1.2mm.

Surface finish:

- Degreasing, phosphoric, powder coated.


Degree of Protection:

- IP20.

Loading Capacity:

- Static loading: 800KG (with adjustable feet).


Width 600mm

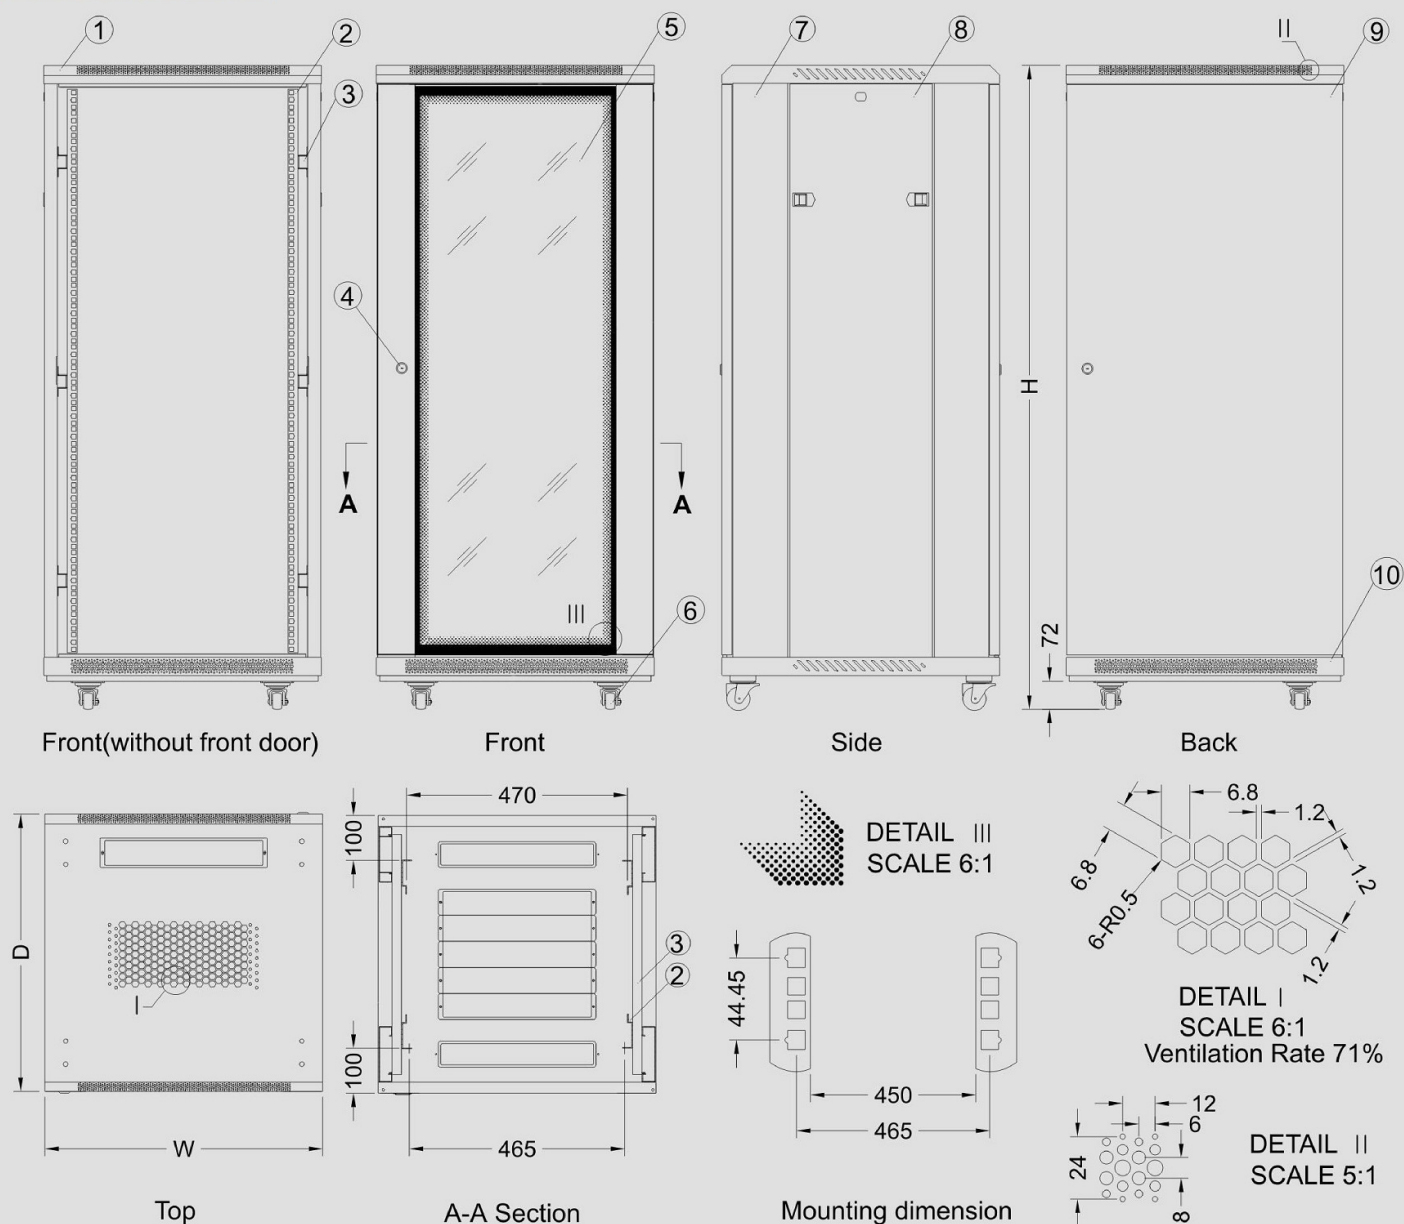

Main parts:

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Top cover	1	Piece	SPCC Cold rolled steel t1.2	Powder coated	---
2	Mounting profile	4	Piece	SPCC Cold rolled steel t2.0	Blue zinc	---
3	Mounting angle	6	Piece	SPCC Cold rolled steel t1.5	Powder coated	4pcs for lower 32U
4	Small round lock	2	Piece	---	Nickel coated	With 4 keys
5	Toughened glass front door	1	Piece	Toughened glass/ SPCC t1.2	Powder coated	---
6	2" heavy duty castor	4	Piece	---	---	---
7	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
8	Side panel	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
9	Steel rear door	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
10	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
11	M6 B-head screw	20	Piece	Steel	Color Zinc	40pcs for over 32U
12	M6 square nut	20	Piece	Steel	Color Zinc	40pcs for over 32U
13	Allen wrench	1	Piece	Steel	Black	---
14	M12 adjustable feet	4	Piece	---	---	---

Width 800mm

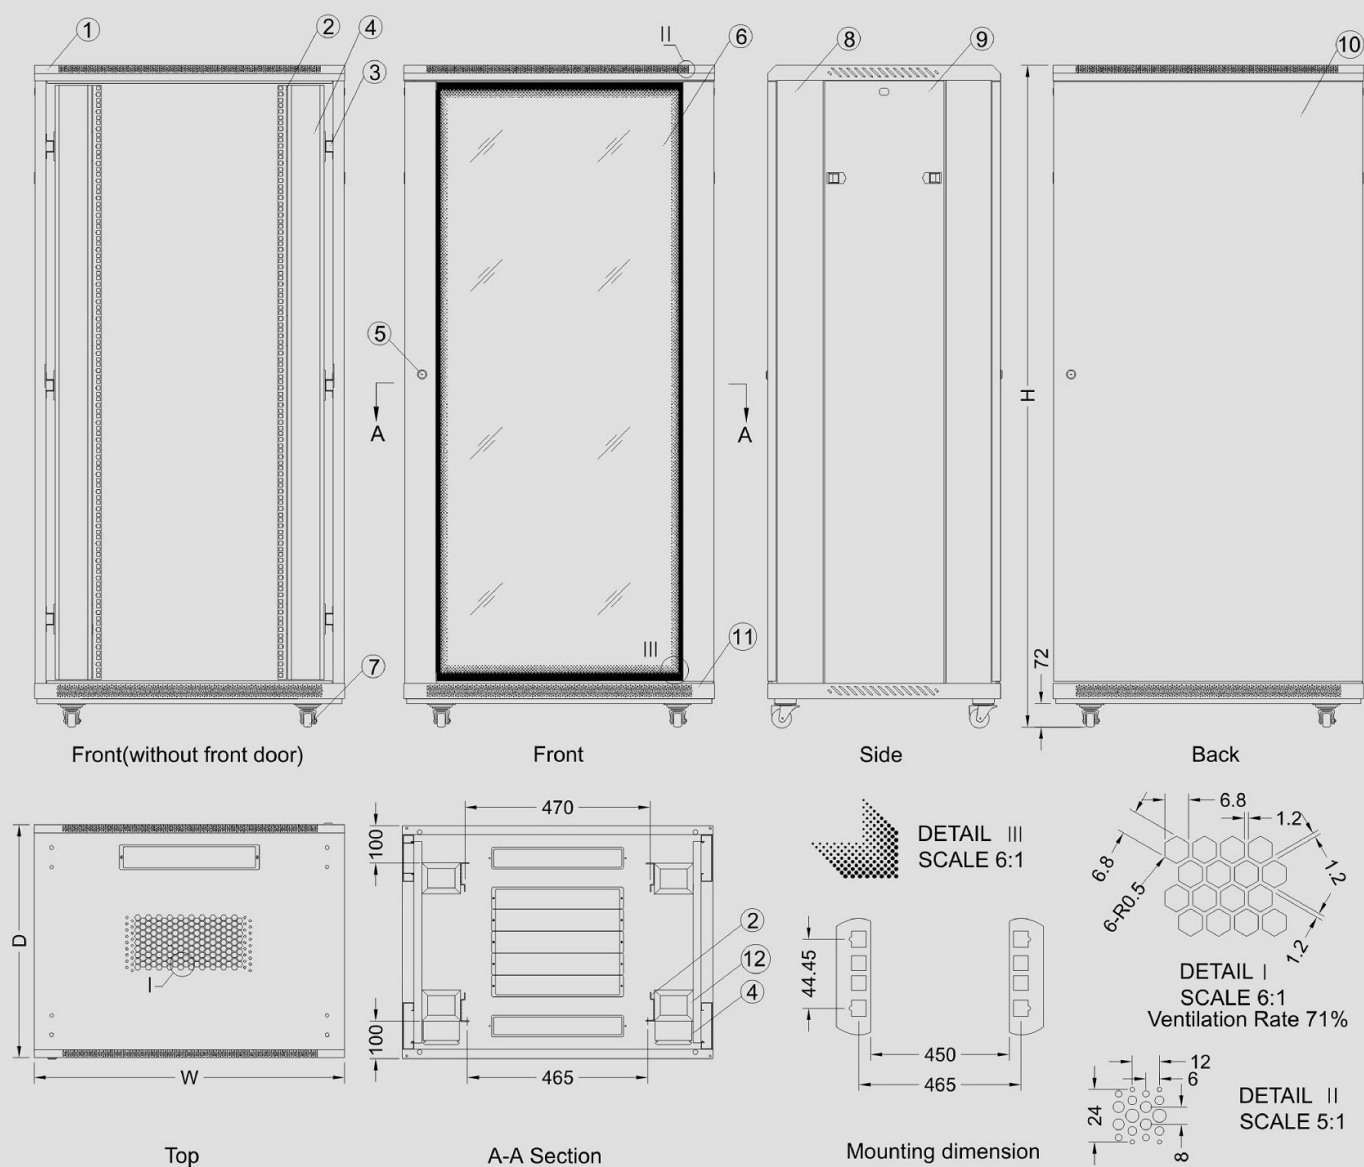

Main parts:

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Top cover	1	Piece	SPCC Cold rolled steel t1.2	Powder coated	---
2	Mounting profile	4	Piece	SPCC Cold rolled steel t2.0	Blue zinc	---
3	Mounting angle	6	Piece	SPCC Cold rolled steel t1.5	Powder coated	4pcs for lower 32U
4	Cable management slot	2	Piece	SPCC Cold rolled steel t0.8	Powder coated	---
5	Small round lock	2	Piece	---	Nickel coated	With 4 keys
6	Toughened glass front door	1	Piece	Toughened glass/ SPCC t1.2	Powder coated	---
7	2" heavy duty castor	4	Piece	---	---	---
8	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
9	Side panel	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
10	Steel rear door	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
11	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
12	Spacer	12	Piece	SPCC cold rolled steel t2.0	Powder coated	8pcs for lower 32U
13	M6 B-head screw	20	Piece	Steel	Color Zinc	40pcs for over 32U
14	M6 square nut	20	Piece	Steel	Color Zinc	40pcs for over 32U
15	Allen wrench	1	Piece	Steel	Black	---
16	M12 Adjustable feet	4	Piece	---	---	---